

ALL STEEL RADIAL OFF-THE-ROAD & INDUSTRIAL TYRES



DRIVEN THE WORLD OVER

「 DRIVEN THE WORLD OVER 」



 **DOUBLECOIN**®
DOUBLE COIN TYRE GROUP LTD

INTRODUCTION.

Devoted to becoming one of the most professional suppliers of tyre products and services

In the 1920s - The Shanghai Great China Rubber Factory and Shanghai Zhengtai Rubber Factory, the earliest tire manufacturers in China, established the "Shanghai Tire & Rubber (Group) Company", and the name was changed in 2017 to "Double Coin Tire Group Ltd". The company's entrepreneurs established China's rubber industry national brands "Double Coin" and "Warrior" in 1929 and 1935 respectively. They combined imported technology with independent innovation, developed and manufactured many firsts in China's tire industry, cultivated and promoted the development of China's tire industry.

The company's main products are all-steel radial truck tires, all-steel radial light truck tires, all-steel radial off-the-road tires, all-steel radial industrial tires, agricultural radial tires, radial passenger tires, bias truck tires, Bias light truck tires, bias industrial tires, etc. The company enjoys self-support import and export rights, and its products are sold to more than 100 countries and regions abroad. The domestic market covers all provinces, cities and autonomous regions. It also supplies products for more than 30 automobile manufacturers such as CIMC, Zhengzhou Yutong, Xiamen Jinlong, and Volvo, and entered the European and American original tire market, matched with trucks, school buses, and construction machinery vehicles of famous auto manufacturers such as SCHMITZ CARGO, Caterpillar, Autocar, UTILITY TRAILER, and entered the European and American mainstream markets represented by famous logistics companies such as JBHUNT.

Devoted to becoming one of the most professional suppliers of the products and services.

CONTENTS.

Earthmover Service Brief Description	03
Sidewall Marks Instruction	04
The Pattern Classifications And Service Conditions	05
Load Index And Maximum Load Relationship	06
Industrial Tyres	07

EARTHMOVER SERVICE BRIEF DESCRIPTION

Regular

24.00R35 ★★

Section Width (Inches)	Radial Structure	Rim Diameter(Inches)	Star Rating
24.00	R	35	★★

Wide Base

23.5R25 ★★

Section Width (Inches)	Radial Structure	Rim Diameter(Inches)	Star Rating
23.50	R	25	★★

Super Wide Base




36/65R33 ★★

Section Width (Inches)	Aspect Ratio 65 Series	Radial Structure	Rim Diameter(Inches)	Star Rating
35	65	R	33	★★

385/95R24

Load Index	Speed Symbol	Section Width(Inches)	Aspect Ratio 65 Series	Rim Diameter(Inches)
170	E	385	95	24

Tyre Aspect Ratio




Tread Depth Design Instruction



SIDEWALL MARKS INSTRUCTION

Tread Compound Instruction

- A. Cut Resistant
- B. Heat Resistant
- S. Standard

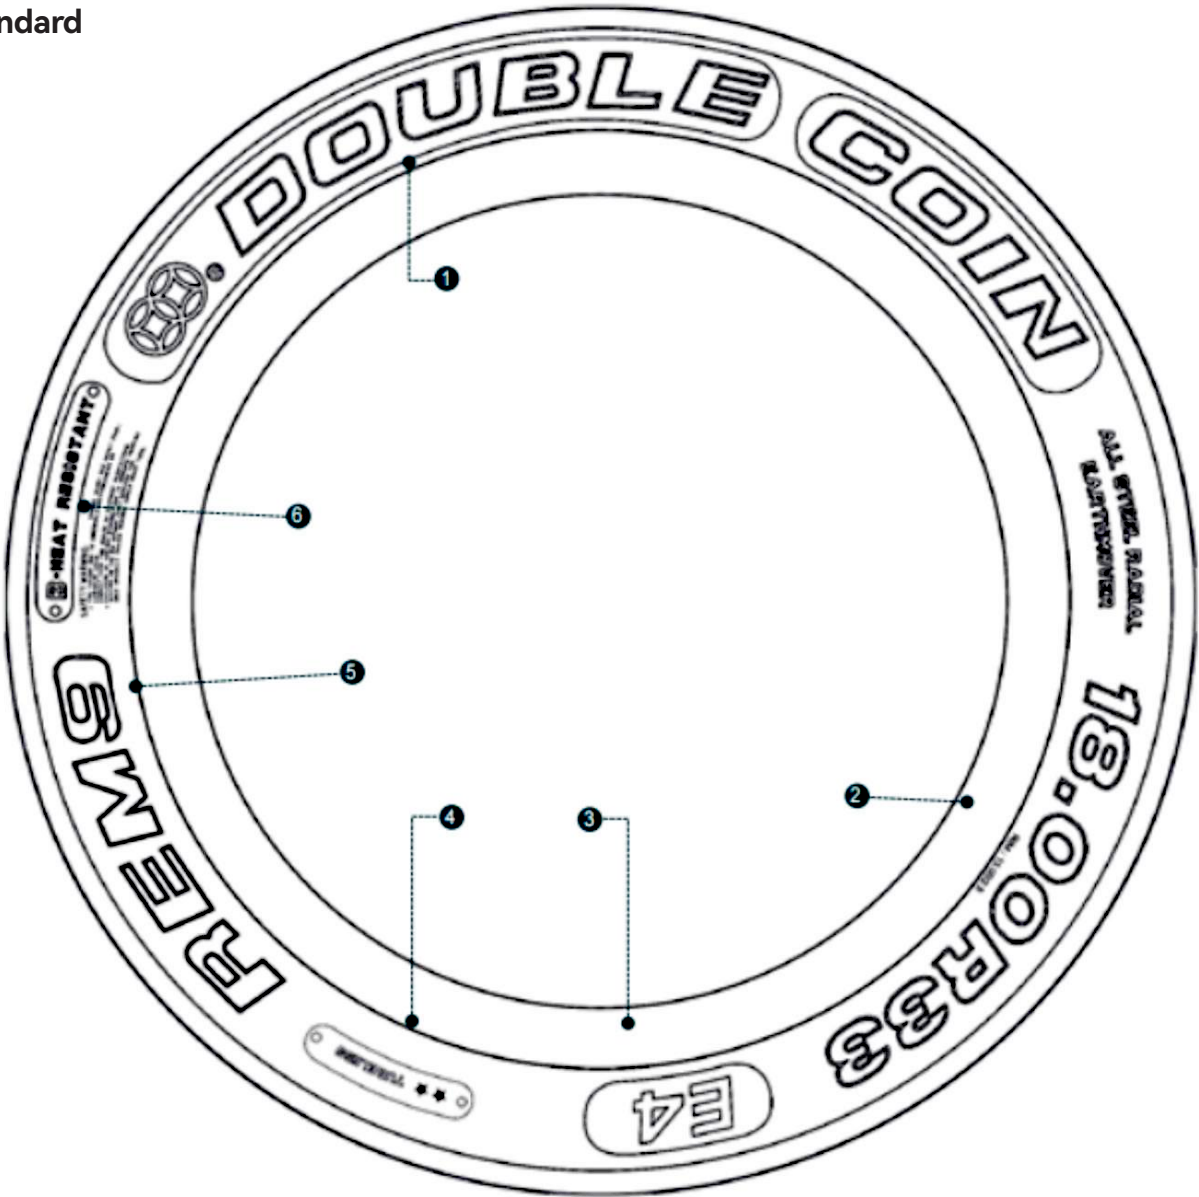

- ① DOUBLE COIN: Brand Name
- ② 18.00R33: Tyre Size
- ③ E4: TRA Code
- ④ ★★: STAR RATING
- ⑤ REM9: Tread Pattern
- ⑥ Specifications Code

THE PATTERN CLASSIFICATIONS AND SERVICE CONDITIONS

	PATTERN NO	PATTERN FORM	SERVICE TYPE	MAXIMUM SPEED	HIGHEST SINGLE MILEAGE
C-ROAD ROLLER TYPE	C-1	Smooth	Road Roller	10KM/H	Unlimited
	C-2	Groove	Road Roller	10KM/H	Unlimited
E-SCRAPER AND DUMPER TYRE	E-1	Regular Stripe	Handling	65KM/H	4KM
	E-2	Regular Traction	Handling	65KM/H	4KM
	E-3	Regular Block	Handling	65KM/H	4KM
	E-4	Deepened Block	Handling	65KM/H	4KM
	E-7	Buoyancy	Handling	65KM/H	4KM
G-GRADER TYRE	G-1	Regular Stripe	Flat	40KM/H	Unlimited
	G-2	Regular Traction	Flat	40KM/H	Unlimited
	G-3	Regular Block	Flat	40KM/H	Unlimited
	G-4	Deepened Block	Flat	40KM/H	Unlimited
LOADER AND EARTHMOVER TYRE	L-2	Regular Traction	Loading Bulldozing	10KM/H	75KM
	L-3	Regular Block	Loading Bulldozing	10KM/H	75KM
	L-4	Deepened Block	Loading Bulldozing	10KM/H	75KM
	L-5	Extra Deepened Block	Loading Bulldozing	10KM/H	75KM
	L-3S	Regular Smooth	Loading Bulldozing	10KM/H	75KM
	L-4S	Thickened Smooth	Loading Bulldozing	10KM/H	75KM
	L-5S	Extra Thick Smooth	Loading Bulldozing	10KM/H	75KM
IND-INDUSTRIAL TYRE	IND-3	Regular Pattern		30KM/H	Unlimited
	IND-4	Deepened Pattern		30KM/H	Unlimited
	IND-5	Extra Deepened Pattern		30KM/H	Unlimited

Speed Symbol

Symbol	A2	A6	A8	B	C	D	E	F	G
KM/H	10	30	40	50	60	65	70	80	90
MPH	6	20	25	30	35	40	45	50	55

LOAD INDEX AND MAXIMUM LOAD RELATIONSHIP

LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD		LOAD INDEX	SINGLE MAX LOAD	
	KG	IB		KG	IB		KG	IB		KG	IB		KG	IB
120	1400	3090	150	3350	7390	180	8000	17640	210	19000	41890	240	45000	99210
121	1450	3200	151	3450	7610	181	8250	18740	211	19500	43000	241	46250	101960
122	1500	3310	152	3550	7830	182	8500	18190	212	20000	44100	242	47500	104720
123	1550	3420	153	3650	8050	183	8750	19290	213	20600	45420	243	48750	107470
124	1600	3530	154	3750	8270	184	9000	19840	214	21200	46750	244	50000	110250
125	1650	3640	155	3875	8540	185	9250	20390	215	21800	48070	245	51500	113540
126	1700	3750	156	4000	8820	186	9500	20940	216	22400	49390	246	53000	117950
127	1750	3860	157	4125	9090	187	9750	21500	217	23000	50700	247	54500	120150
128	1800	3970	158	4250	9370	188	10000	22050	218	23600	52040	248	56000	123480
129	1850	4080	159	4375	9650	189	10300	22710	219	24300	53580	249	58000	127890
130	1900	4190	160	4500	9920	190	10600	23370	220	25000	55120	250	60000	132300
131	1950	4300	161	4625	10200	191	10900	24030	221	25750	56780	251	61500	135580
132	2000	4410	162	4750	10470	192	11200	24690	222	26500	58430	252	63000	138890
133	2060	4540	163	4875	10750	193	11500	25360	223	27250	60070	253	65000	143300
134	2120	4670	164	5000	11020	194	11800	26020	224	28000	61740	254	67000	147710
135	2180	4810	165	5150	11350	195	12150	26790	225	29000	63940	255	69000	152120
136	2240	4940	166	5300	11690	196	12500	27560	226	30000	66150	256	71000	156530
137	2300	5070	167	5450	12020	197	12850	28330	227	30750	67790	257	73000	160930
138	2360	5200	168	5600	12350	198	13200	29100	228	31500	69460	258	75000	165340
139	2430	5360	169	5800	12790	199	13600	29990	229	32500	71660	259	77500	170660
140	2500	5510	170	6000	13230	200	14000	30870	230	33500	73870	260	80000	176400
141	2575	5680	171	6150	13560	201	14500	31970	231	34500	76070	261	82500	181880
142	2650	5840	172	6300	13890	202	15000	33070	232	35500	78280	262	85000	187390
143	2725	6010	173	6500	14330	203	15500	34180	233	36500	80480	263	87500	192900
144	2800	6170	174	6700	14770	204	16000	35280	234	37500	82690	264	90000	198450
145	2900	6390	175	6900	15210	205	16500	36380	235	38750	85430	265	92500	203920
146	3000	6610	176	7100	15650	206	17000	37480	236	40000	88200	266	95000	209440
147	3075	6780	177	7300	16090	207	17500	38590	237	41250	90940	267	97500	214950
148	3150	6950	178	7500	16530	208	18000	39690	238	42500	93710	268	100000	220500
149	3250	7170	179	7750	17090	209	18500	40790	239	43750	96470	269	103000	227370

CONTENTS.

Loader and Dozer Service

09

E2



REM8

REM15

REM28S

E3



REM2

REM7

REM10

REM21+

DT301

DT302

E4



REM9

Grader Service

20

G2



REM1

Earthmover Service

22

L2



REM1

L3



REM2



REM10



REM21+

L5



REM12



REM18



REM19

L5S



REM6S

Industrial Service

30

IND



REM3



REM4



REM6



REM17



REM26

EARTHMOVER SERVICE





REM8

FEATURES AND BENEFITS:

- High speed mobile crane tire for both on and off-the-road highway applications
- Universal tread pattern provides increased traction.
- DOT approved for on-highway use and built strong for off-the-road
- OEM Certified

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R24	★★★	70	1364	396	25	10.00W	6340	1000
14.00R25	★★★	70	1364	396	25	10.00/1.5	6340	1000
16.00R25	★★★	70	1488	432	26	11.25/2.0	7400	900
16.00R25	★★	80	1488	432	26	11.25/2.0	6700	900
20.5R25	★★	70	1490	540	31	17.00/2.0	7757	703
385/95R25	★★	80	1364	396	25	10.00/1.5	6000	900
385/95R25	—	90	1364	396	25	10.00/1.5	6000	900
445/95R25	—	100	1488	432	26	11.25/2.0	6000	900
525/80R25	★★	80	1490	540	31	17.00/2.0	7100	700



REM15

FEATURES AND BENEFITS:

- All-purpose tread design provides exceptional traction and even wear.
- Wide footprint offers excellent flotation and smooth ride.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.5R25	★	10	1340	458	29	14.00/1.5	7100	450
	★★						8500	575

EARTHMOVER SERVICE



REM28S

FEATURES AND BENEFITS:

- For use on loaders and graders where enhanced winter performance is required
- Lateral wavy groove design provides excellent traction.
- Tread block design offers smooth ride in slush conditions.
- Special tread formula enhances the tear resistance and prolongs the service life.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
385/95R24	★ ★	50	1360	396	25	10.00	5600	700
385/95R25	★ ★ ★ ★	70	1360	396	25	10.00/1.5	6340	1000
17.5R25	★ ★	50	1340	455	27	14.00/1.5	5450	525
		10					8500	650
20.5R25	★ ★	50	1484	540	31	17.00/2.0	7300	525
		10					11500	650
23.5R25	★ ★	50	1617	600	36	19.50/2.5	9250	450
		10					14500	575



REM2

FEATURES AND BENEFITS:

- Enhanced self-cleaning design for all purpose OTR applications
- Multi-function, non-directional tread design for optimum usage on equipment
- Superior traction in sand, stone, mud and other surfaces
- OEM Certified

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.5R25	★	50	1340	448	27	14.00/1.5	4125	350
		10					7100	450
17.5R25	★★	50	1340	448	27	14.00/1.5	5450	450
		10					8500	575
20.5R25	★	50	1480	527	31	17.00/2.0	5600	350
		10					9500	450
20.5R25	★★	50	1480	527	31	17.00/2.0	7300	450
		10					11500	575
23.5R25	★	50	1617	600	36	19.50/2.5	7100	350
		10					12150	450
23.5R25	★★	50	1617	600	36	19.50/2.5	9250	450
		10					14500	575
26.5R25	★	50	1748	695	37.5	22.00/3.0	9000	350
		10					15000	450
26.5R25	★★	50	1748	695	37.5	22.00/3.0	11500	450
		10					18500	575
29.5R25	★★	50	1860	748	40	25.00/3.5	14000	450
		10					22400	575
750/65R25	★★	50	1606	760	43	24.00/3.0	10600	425
		10					18500	625
775/65R29	★★	50	1750	770	46	24.00/3.5	12150	425
		10					20600	625
875/65R29	★★	50	1875	890	48	28.00/3.5	15500	425
		10					25750	625

EARTHMOVER SERVICE

RLB1



REM7

FEATURES AND BENEFITS:

- For large scrapers.
- Optimized design for tread provides superior traction.
- Improved ground contact area effectively increases wear-resistance.
- Unique design of the groove prevents tread groove crack, thus prolonging the service life.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
33.25R29	★ ★	50	2060	850	45	27.00/3.5	18500	500



REM21+

FEATURES AND BENEFITS:

- New tread design provides superior traction.
- Special design for the crown and side wall increases resistance to punctures and scratches.
- Improved carcass design enhances tear resistance of the tread, therefore prolonging the service life.
- Suitable for heavy-load conditions

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★ ★ ★	50	1366	375	28	10.00/2.0	5800	700
		10					10000	950



REM10

FEATURES AND BENEFITS:

- Multi-function, non-directional tread design for optimum usage on articulated equipment
- Superior OTR performance in multiple types of terrain
- Unique center block tread design provides additional traction, even wear and promotes retreadability.
- OEM Certified

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★★	50	1356	375	25	10.00/2.0	5800	700
		10					10000	950
16.00R25	★★	50	1482	430	26	11.25/2.0	8000	800
		10					13200	900
17.00R29	★★	10	1625	452	33	11.50/2.5	14050	950
26.5R25	★★	50	1754	695	40.5	22.00/3.0	11500	450
		10					18500	575
29.5R25	★★	50	1868	748	44	25.00/3.5	14000	450
		10					22400	575

REM10 PRO

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.00R29	★★★★	10	1625	460	33	13.00/2.5	14050	950

EARTHMOVER SERVICE.



DT301

FEATURES AND BENEFITS:

- A large pattern design with higher pattern saturation and an anti-puncture step design for the bottom of the groove.
- The use of high-strength new structural steel wire provides stronger load capacity, reducing the deformation of heavy tire loads.
- A new formula for low heat generation, high cutting resistance and wear resistance in mining prolongs the service life.
- The bead which is close to the rim contributes small deformation, low heat generation and long service life under heavy load.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★★★★	50	1366	375	28.5	10.00/2.0	5800	700
		10					10000	950

DT301 PRO

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
16.00R25	★★★★	50	1490	430	32	11.25/2.0	8000	800
		10					13200	900



DT302

FEATURES AND BENEFITS:

- A lateral high saturation design for the pattern provides excellent traction.
- High-strength new structural steel wires provide stronger load capacity.
- A cut-resistant and heat-resistant formula improves the service life of the tyre.
- Strengthened crown and sidewall design offers good resistance to punctures and scratches.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★★★★	50	1366	375	28.5	10.00/2.0	5800	700
		10					10000	950
16.00R25	★★★★	50	1490	430	32	11.25/2.0	8000	800
		10					13200	900

DT302MAX

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
16.00R25	★★★★	50	1520	450	29	11.25/2.0	8000	800
		10					13200	900

EARTHMOVER SERVICE.



FEATURES AND BENEFITS:

- Special compounds to withstand severe mining applications
- OTR radial design extends tyre life and promotes long-term retreadability.
- A non-directional center rib tread pattern for enhanced off-the-road traction
- Deep tread depth provides extended tread life in a wide variety of conditions.

REM9

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
26.5R25	★ ★	50	1782	672	55	22.00/3.0	11500	450
		10					18500	575
29.5R25	★ ★	50	1905	750	60	25.00/3.5	14000	450
		10					22400	575
18.00R33	★ ★	50	1865	498	53	13.00/2.5	10900	650
		10					18500	800
21.00R33	★ ★	50	1964	565	55	15.00/3.0	14000	650
		10					23600	800
24.00R35	★ ★	50	2160	652	69	17.00/3.5	18500	650
		10					30750	800

A close-up photograph of a grader's large, treaded tire. The tire is black with a deep, aggressive tread pattern. A red wheel hub is visible through the tire's center. The background is dark and out of focus, showing parts of the grader's body. A yellow diagonal graphic element is in the top-left corner, and a grey and yellow diagonal graphic element is in the bottom-right corner.

GRADER SERVICE

GRADER SERVICE



REM1

FEATURES AND BENEFITS:

- A multi-purpose tread design leads to exceptional traction and even wear.
- Wide footprint offers excellent flotation while also ensuring a smooth ride.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
13.00R24	★	40	1296	352	30	8.00TG	3000	375
14.00R24	★	40	1365	385	30	8.00TG	3650	375



**LOADER & DOZER
SERVICE**

LOADER & DOZER SERVICE



REM1

FEATURES AND BENEFITS:

- A multi-purpose tread design leads to exceptional traction and even wear.
- Wide footprint offers excellent flotation while also ensuring a smooth ride.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
13.00R24	★	40	1296	352	30	8.00TG	3000	375
14.00R24	★	40	1365	385	30	8.00TG	3650	375

LOADER & DOZER SERVICE



FEATURES AND BENEFITS:

- Enhanced self-cleaning design for all purpose OTR applications
- Multi-function, non-directional tread design for optimum usage on equipment
- Superior traction in sand, stone, mud and other surfaces
- OEM Certified

REM2/REM2N

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.5R25	★	50	1340	448	27	14.00/1.5	4125	350
		10					7100	450
17.5R25	★★	50	1340	448	27	14.00/1.5	5450	450
		10					8500	575
20.5R25	★	50	1480	527	31	17.00/2.0	5600	350
		10					9500	450
20.5R25	★★	50	1480	527	31	17.00/2.0	7300	450
		10					11500	575
23.5R25	★	50	1617	600	36	19.50/2.5	7100	350
		10					12150	450
23.5R25	★★	50	1617	600	36	19.50/2.5	9250	450
		10					14500	575
26.5R25	★	50	1748	695	37.5	22.00/3.0	9000	350
		10					15000	450
26.5R25	★★	50	1748	695	37.5	22.00/3.0	11500	450
		10					18500	575
29.5R25	★★	50	1860	748	40	25.00/3.5	14000	450
		10					22400	575
750/65R25	★★	50	1606	760	43	24.00/3.0	10600	425
		10					18500	625
775/65R29	★★	50	1750	770	46	24.00/3.5	12150	425
		10					20600	625
875/65R29	★★	50	1875	890	48	28.00/3.5	15500	425
		10					25750	625
23.5R25 REM2N	★★	50	1617	600	30	19.50/2.5	9250	450
		10					14500	575

LOADER & DOZER SERVICE



REM10

FEATURES AND BENEFITS:

- Multi-function, non-directional tread design for optimum usage on articulated equipment
- Superior OTR performance in multiple types of terrain
- Unique center block tread design provides additional traction, even wear and promotes retreadability.
- OEM Certified

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★★★★	50	1356	375	25	10.00/2.0	5800	700
		10					10000	950
16.00R25	★★★★	50	1482	430	26	11.25/2.0	8000	800
		10					13200	900
17.00R29	★★★★	10	1625	452	33	11.50/2.5	14050	950
26.5R25	★★★	50	1754	695	40.5	22.00/3.0	11500	450
		10					18500	575
29.5R25	★★★	50	1868	748	44	25.00/3.5	14000	450
		10					22400	575

REM10 PRO

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.00R29	★★★★	10	1625	460	33	13.00/2.5	14050	950



REM21+

FEATURES AND BENEFITS:

- New tread design provides superior traction.
- Special design for the crown and side wall increases resistance to punctures and scratches.
- Improved carcass design enhances tear resistance of the tread, therefore prolonging the service life.
- Suitable for heavy-load conditions

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
14.00R25	★★★★	50	1366	375	28	10.00/2.0	5800	700
		10					10000	950



REM12

FEATURES AND BENEFITS:

- Multi-function, non-directional tread design for optimum usage on equipment.
- Superior traction in sand, stone, mud and other surfaces.
- Unique center block tread design provides additional traction, enhanced smooth ride and even wear.

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
17.5R25	★	10	1400	470	66.5	14.00/1.5	6600	450
	★★★						8500	575
26.5R25	★	10	1800	690	92	22.00/3.0	15000	450
	★★★						18500	575
29.5R25	★	10	1905	775	100	25.00/3.5	18000	450
	★★★						22400	575

LOADER & DOZER SERVICE



FEATURES AND BENEFITS:

- Wide footprint for stability.
- Center riding rib for ride comfort.
- Directional tread design for increased off-the-road forward traction.
Special cut and chip resistance compounds extend tire life and promote
- retreadability.

REM18

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
35.65R33	★	10	2056	934	98	28.00/3.5	23000	500
	★★★						27250	650



FEATURES AND BENEFITS:

- Non-directional tread pattern with center rib provides enhanced traction.
- Wide footprint for stabilitycenter riding rib for ride comfort.
- Special cut and chip resistance compounds extend tire life and promote retreadability.

REM19

TIRE SIZE	LOAD SYMBOL	SPEED (KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)
20.5R25	★	10	1530	536	72	17.00/2.0	9500	450
	★★★						11500	575
23.5R25	★	10	1662	612	78	19.50/2.5	12150	450
	★★★						14500	575
26.5R25	★	10	1800	690	92	22.00/3.0	15000	450
	★★★						18500	575
29.5R25	★	10	1905	775	100	25.00/3.5	18000	450
	★★★						22400	575

INDUSTRIAL TYRES



INDUSTRIAL TYRES



FEATURES AND BENEFITS:

- Special uni-directional design for maximum traction in skid loader applications.
- Increased tread life with optimum compounds.
- Enhanced off-the-road handling and ride with radial design.

REM3

TIRE SIZE	SPEED(KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX
10R16.5	25	773	264	18.5	8.25	1800	375	128
12R16.5	25	832	315	23	9.75	2575	375	141



FEATURES AND BENEFITS:

- New tread design strengthens the grip of the tires and improves the traction of the tires.
- Unique tread formula provides excellent wear resistance and longer service life.
- Reinforced crown and sidewall design provides good resistance to puncture and abrasion.

REM4

TIRE SIZE	SPEED(KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX
225/65R15	35	686	235	14	7.00	3250	1000	149



REM6

FEATURES AND BENEFITS:

- Flat, wide and open tread design provides optimum traction performance.
- Special tread compounds fight rapid wear and punctures.
- Wide size range offers optimum stability and reduced lateral movement in a wide variety of applications.

TIRE SIZE	SPEED(KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX
5.00R8	25	468	137	24.5	3.00D	1090	1000	111
6.00R9	25	540	162	25	4.00E	1450	1000	121
6.50R10	25	585	180	27	5.0	1800	1000	128
7.00R12	25	670	190	28	5.00S	2240	1000	136
7.00R15	25	736	195	28	5.5	2725	1000	143
7.50R15	25	770	215	30	6.0	3000	1000	146
8.25R15	25	838	232	32	6.5	3650	1000	153
225/75R15	25	706	230	25	7.0	3250	1000	149
250/70R15	25	736	252	26.5	7.0	3650	1000	153
315/70R15	25	835	312	36	8.0	5150	1000	165
10.00R20	25	1062	294	35	7.5	5300	1000	166
12.00R20	25	1136	320	41	8.5	7100	1000	176
12.00R24	25	1232	322	39	8.5	7500	1000	178
14.00R24	25	1416	390	64	10.0	11500	1000	193
18.00R25	25	1656	522	63.5	13.00/2.5	17500	1000	207

INDUSTRIAL TYRES



REM17

FEATURES AND BENEFITS:

- Flat, wide tread face provides optimum performance and wear.
- Exceptional stability with reduced lateral movement in a wide variety of applications including port applications
- Special tread compounds fight rapid wear and scrub.

TIRE SIZE	SPEED(KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX
16.00R25	25	1495	424	56	11.25/2.0	14000	1000	200

FEATURES AND BENEFITS:



REM26

- For heavy-duty flatbed truck, airport tractor, port machinery and underground mining vehicle.
- Newly designed industrial tyre pattern has excellent adaptability for roads in ports and airports.
- Deep and wide tread design extends service life.
- The design of the hill reinforcement and anti-stone structure gives the tyre more resistance to punctures.
- Tortuous grooves provide greater traction and grip.

TIRE SIZE	SPEED(KM/H)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX
180/70R8	25	456	174	20	4.33R	1650	1000	125
225/75R10	25	586	226	21	6.5F	2650	1000	142
315/70R15	25	828	316	31	8.0	5150	1000	165
7.00R15	25	728	195	22	5.5	2725	1000	143
12.00R20	25	1122	320	36	8.5	7100	1000	176

TECHNICAL DATA

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
13.00R24	REM1	★	40	A8	1296	352	30	8.00TG	3000	375	146	G2/L2
14.00R24	REM1	★	40	A8	1365	385	30	8.00TG	3650	375	153	G2/L2
17.5R25	REM2	★	50	B	1340	448	27	14.00/1.5	4125	350	157	E3/L3
			10	A2					7100		176	
17.5R25	REM2	★★	50	B	1349	448	27	14.00/1.5	5450	450	167	E3/L3
			10	A2					8500		182	
20.5R25	REM2	★	50	B	1480	527	31	17.00/2.0	5600	375	168	E3/L3
			10	A2					9500		186	
20.5R25	REM2	★★	50	B	1480	527	31	17.00/2.0	7300	450	177	E3/L3
			10	A2					11500		193	
23.5R25	REM2	★	50	B	1617	600	36	19.50/2.5	7100	350	176	E3/L3
			10	A2					12150		195	
23.5R25	REM2	★★	50	B	1617	600	36	19.50/2.5	9250	450	185	E3/L3
			10	A2					14500		201	
23.5R25	REM2N	★★	50	B	1617	600	30	19.50/2.5	9250	450	185	L3
			10	A2					14500		201	
26.5R25	REM2	★	50	B	1748	695	37.5	22.00/3.0	9000	350	184	E3/L3
			10	A2					15000		202	
26.5R25	REM2	★★	50	B	1748	695	37.5	22.00/3.0	11500	450	193	E3/L3
			10	A2					18500		209	
29.5R25	REM2	★★	50	B	1860	748	40	25.00/3.5	14000	450	200	E3/L3
			10	A2					22400		216	
750/65R25	REM2	★★	50	B	1606	760	43	24.00/3.0	10600	425	190	E3/L3
			10	A2					18500		209	
775/65R29	REM2	★★	50	B	1750	770	46	24.00/3.5	12150	426	195	E3/L3
			10	A2					20600		213	
875/65R29	REM2	★★	50	B	1875	890	48	28.00/3.5	15500	425	203	E3/L3
			10	A2					25750		201	

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
33.25R29	REM7	★★	50	B	2060	850	45	27.00/3.5	18500	500	209	E3
14.00R24	REM8	★★★★	70	E	1364	396	25	10.00W	6340	1000	170	E2
14.00R25	REM8	★★★★	70	E	1364	396	25	10.00/1.5	6340	1000	170	E2
16.00R25	REM8	★★★★	70	E	1488	432	26	11.25/2.0	7400	900	177	E2
16.00R25	REM8	★★	80	F	1488	432	26	11.25/2.0	6700	900	174	E2
20.5R25	REM8	★★	70	E	1490	540	31	17.00/2.0	7757	703	179	E2
385/95R25	REM8	★★	80	F	1364	396	25	10.00/1.5	6000	900	170	E2
385/95R25	REM8	—	90	G	1364	396	26	10.00/1.5	6000	900	170	E2
445/95R25	REM8	—	100	J	1488	432	26	11.25/2.0	6000	900	170	E2
525/80R25	REM8	★★	80	F	1490	540	31	17.00/22.0	7100	700	176	E2
26.5R25	REM9	★★	50	B	1782	672	55	22.00/3.0	11500	450	193	E4
			10	A2					18500	575	209	
29.5R25	REM9	★★	50	B	1905	750	60	25.00/3.5	14000	450	200	E4
			10	A2					22400	575	216	
18.00R33	REM9	★★	50	B	1865	498	53	13.00/2.5	10900	650	191	E4
			10	A2					18500	800	209	
21.00R33	REM9	★★	50	B	1964	565	55	15.00/3.0	14000	650	200	E4
			10	A2					23600	800	218	
24.00R35	REM9	★★	50	B	2160	652	69	17.00/3.5	18500	650	209	E4
			10	A2					30750	800	227	

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
14.00R25	REM10	★★★★	50	B	1356	375	25	10.00/2.0	5800	700	169	E3
			10	A2					10000	950	188	
16.00R25	REM10	★★★★	50	B	1482	430	26	11.25/2.0	8000	800	180	E3
			10	A2					13200	900	198	
17.00R29	REM10	★★★★	10	A2	1625	452	36	11.50/2.5	14050	950	200	E3
17.00R29	REM10 PRO	★★★★	10	A2	1625	460	36	13.00/2.5	14050	950	200	E3
26.5R25	REM10	★★	50	B	1754	695	40.5	22.00/3.0	11500	450	193	E3/L3
			10	A2					18500	575	209	
29.5R25	REM10	★★	50	B	1868	748	44	25.00/3.5	14000	450	200	E3/L3
			10	A2					22400	575	216	
17.5R25	REM12	★	10	A2	1400	470	66.5	14.00/1.5	6600	450	174	L5
		★★							8500	575	182	
26.5R25	REM12	★	10	A2	1800	690	92	22.00/3.0	15000	450	202	L5
		★★							18500	575	209	
29.5R25	REM12	★	10	A2	1905	775	100	25.00/3.5	18000	450	208	L5
		★★							22400	575	216	
17.5R25	REM15	★	10	A2	1340	458	29	14.00/1.5	7100	450	176	L2
		★★							8500	575	182	
35/65R33	REM18	★	10	A2	2056	934	98	28.00/3.5	23000	500	217	L5
		★★							27250	650	223	
20.5R25	REM19	★	10	A2	1530	536	72	17.00/2.0	9500	450	186	L5
		★★							11500	575	193	
23.5R25	REM19	★	10	A2	1662	612	78	19.50/2.5	12150	450	195	L5
		★★							14500	575	201	
26.5R25	REM19	★	10	A2	1800	690	92	22.00/3.5	15000	450	202	L5
		★★							18500	575	209	
29.5R25	REM19	★	10	A2	1905	775	100	25.00/3.5	18000	450	208	L5
		★★							22400	575	216	

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
14.00R25	REM21+	★★★★	50	B	1366	375	28	10.00/2.0	5800	700	169	E3/L3
			10	A2					10000	950	188	
385/95R25	REM28S	★★	50	B	1360	396	25	10.00	5600	700	168	E2
385/95R25	REM28S	★★★★	70	E	1360	396	25	10.00/1.5	6340	1000	170	E2
17.5R25	REM28S	★★	50	B	1340	455	27	14.00/1.5	5450	525	167	E2
			10	A2					8500	650	182	
20.5R25	REM28S	★★	50	B	1484	540	31	17.00/2.0	7300	525	177	E2
			10	A2					11500	650	193	
23.5R25	REM28S	★★	50	B	1617	600	36	19.50/2.5	9250	450	185	E2
			10	A2					14500	575	201	
14.00R25	DT301	★★★★	50	B	1366	375	28.5	10.00/2.0	5800	700	169	E3
			10	A2					10000	950	188	
16.00R25	DT301 PRO	★★★★	50	B	1490	430	32	11.25/2.0	8000	800	180	E3
			10	A2					13200	900	198	
14.00R25	DT302	★★★★	50	B	1366	375	28.5	10.00/2.0	5800	700	169	E3
			10	A2					10000	950	188	
16.00R25	DT302	★★★★	50	B	1490	430	32	11.25/2.0	8000	800	180	E3
			10	A2					13200	900	198	
16.00R25	DT302MAX	★★★★	50	B	1520	450	29	11.25/2.0	8000	800	180	
			10	A2					13200	900	198	

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
10R16.5	REM3	—	25	A5	773	264	18.5	8.25	1800	375	128	IND
12R16.5	REM3	—	25	A5	832	315	23	9.75	2575	375	141	IND
225/65R15	REM4	—	35	A7	686	235	14	7.00	3250	1000	149	IND
5.00R8	REM6	—	25	A5	468	137	24.5	3.00D	1090	1000	111	IND
6.00R9	REM6	—	25	A5	540	162	25	4.00E	1450	1000	121	IND
6.50R10	REM6	—	25	A5	585	180	27	5.0	1800	1000	128	IND
7.00R12	REM6	—	25	A5	670	190	28	5.00S	2240	1000	136	IND
7.00R15	REM6	—	25	A5	736	195	28	5.5	2725	1000	143	IND
7.50R15	REM6	—	25	A5	770	215	30	6.0	3000	1000	146	IND
8.25R15	REM6	—	25	A5	838	232	32	6.5	3650	1000	153	IND
225/75R15	REM6	—	25	A5	706	230	25	7.0	3250	1000	149	IND
250/70R15	REM6	—	25	A5	736	252	26.5	7.0	3650	1000	153	IND
315/70R15	REM6	—	25	A5	835	312	36	8.0	5150	1000	165	IND
10.00R20	REM6	—	25	A5	1062	294	35	7.5	5300	1000	166	IND
12.00R20	REM6	—	25	A5	1136	320	41	8.5	7100	1000	176	IND

TECHNICAL DATA

TIRE SIZE	PATTERN	LOAD SYMBOL	SPEED (KM/H)	SPEED SYMBOL	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	RIM	SINGLE MAX LOAD (KG)	SINGLE MAX LOAD PRESSURE (KPA)	LOAD INDEX	NOTE
12.00R24	REM6	—	25	A5	1232	322	39	8.5	7500	1000	178	IND
14.00R24	REM6	—	25	A5	1416	390	64	10.0	11500	1000	193	IND
18.00R25	REM6	—	25	A5	1656	522	63.5	13.00/2.5	17500	1000	207	IND
16.00R25	REM17	—	25	A5	1495	424	56	11.25/2.0	14000	1000	200	IND
225/75R10	REM26	—	25	A5	586	226	21	6.5F	2650	1000	142	IND
315/70R15	REM26	—	25	A5	828	316	31	8.0	5150	1000	165	IND
7.00R15	REM26	—	25	A5	728	195	22	5.5	2725	1000	143	IND
12.00R20	REM26	—	25	A5	1122	320	36	8.5	7100	1000	176	IND